


BT-200PA

BETA MIXER AMPLIFIER

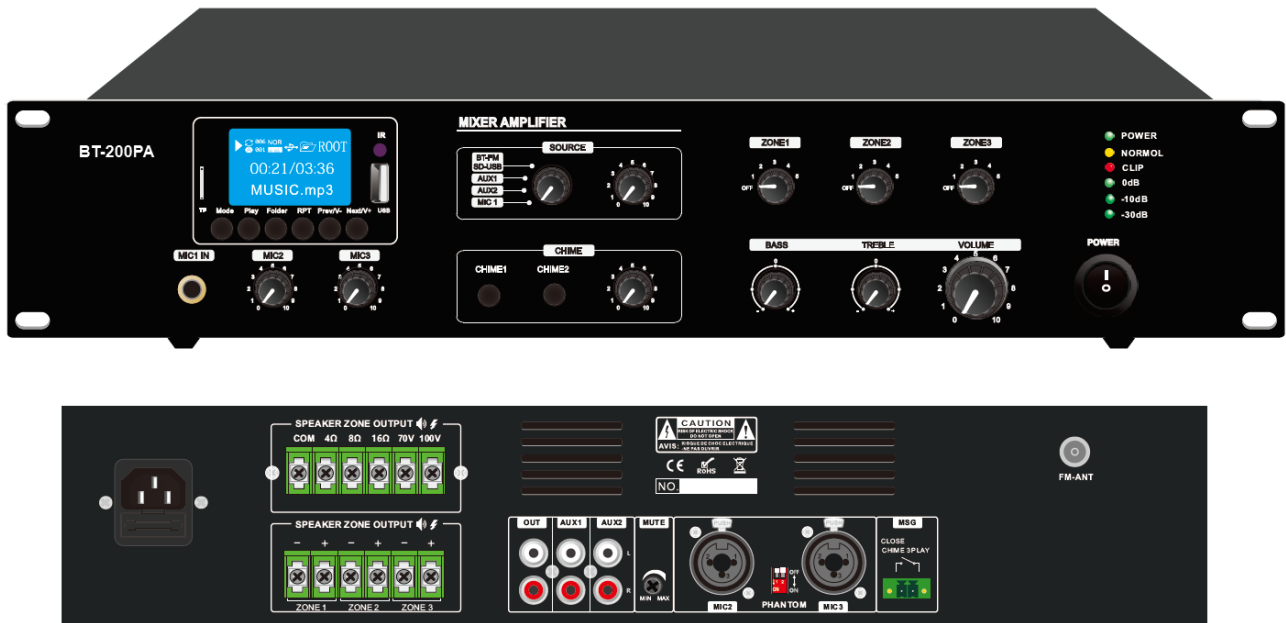

Description:

The BETA BT-200PA 3-Zone Mixer Amplifier with USB/FM/Bluetooth and rated power output 200W, it is all-in-one solution with mixer and power amplifier into one 19" standard cabinet design, economy but of high reliable performance. It integrates different audio sources into a mixer amplifier: 1 Mic 6.5mm and 1-2 AUX Line input. One USB slot on front provide easy access and operation for installer and end-user. The amplifier is design with complete protection of overload, short circuit and high temp to avoid any damage, allowing for 24/7/365 long time. These amplifiers are suitable for applications in bank, mosque, school, hotel, restaurants theme centers and shopping center.

Features:

- Public address (PA) 3 zone mixer power amplifier
- 19" rack mount amplifier
- Rated output 200W
- 3 zone speaker outputs to 100V/70V, 4-16 Ω
- 3 zone speaker outputs with independent volume control and chime button
- Built-in digital screen display with USB/FM tuner/Bluetooth
- Mic1 Input 6.5mm Jack
- AUX RCA 1-2 line input
- Volume control for Mic1-3, chime button and 3 zone volume control
- LED indicators status
- Complete amplifier protection includes overload, clip, short circuit and high temp protection.
- 220-230V , 50/60 Hz

TECHNICAL SPECIFICATIONS

Model	BT-200PA
Type	Class AB
Description	3 zone mixer amplifier with USB/FM/Bluetooth
Power output	Rated output 200W (RMS 150W)
Speaker output	70/100V at 4-16 ohms
Input	Mic1 6.5 mm jack, AUX RCA 1-2 Line, 2 XLR combo
Front panel	3 speaker control switches
Rear panel	3 independent speaker outputs with screw connector
Frequency response	80 Hz-16 kHz
Total harmonic distortion	<0.1%
Phantom power	48V with switch
Independent volume adjustment	3
Protection	High temp, short circuit, overload
Power supply	220-230V , 50/60 Hz
Dimension	484 × 405 × 88 mm
Weight	8.0 k

www.betaaudio.org